


PROGRADINO (SERIES A)

Anodized Aluminum

KALLOS PROGRADINO (KASN) is a contemporary design ALUMINUM Step edge profile. Providing edge protection to the floor covering and highlighting the step edge. **KALLOS Aluminum Profiles** are supplied with protection film for added protection, before, during and after application - as standard.

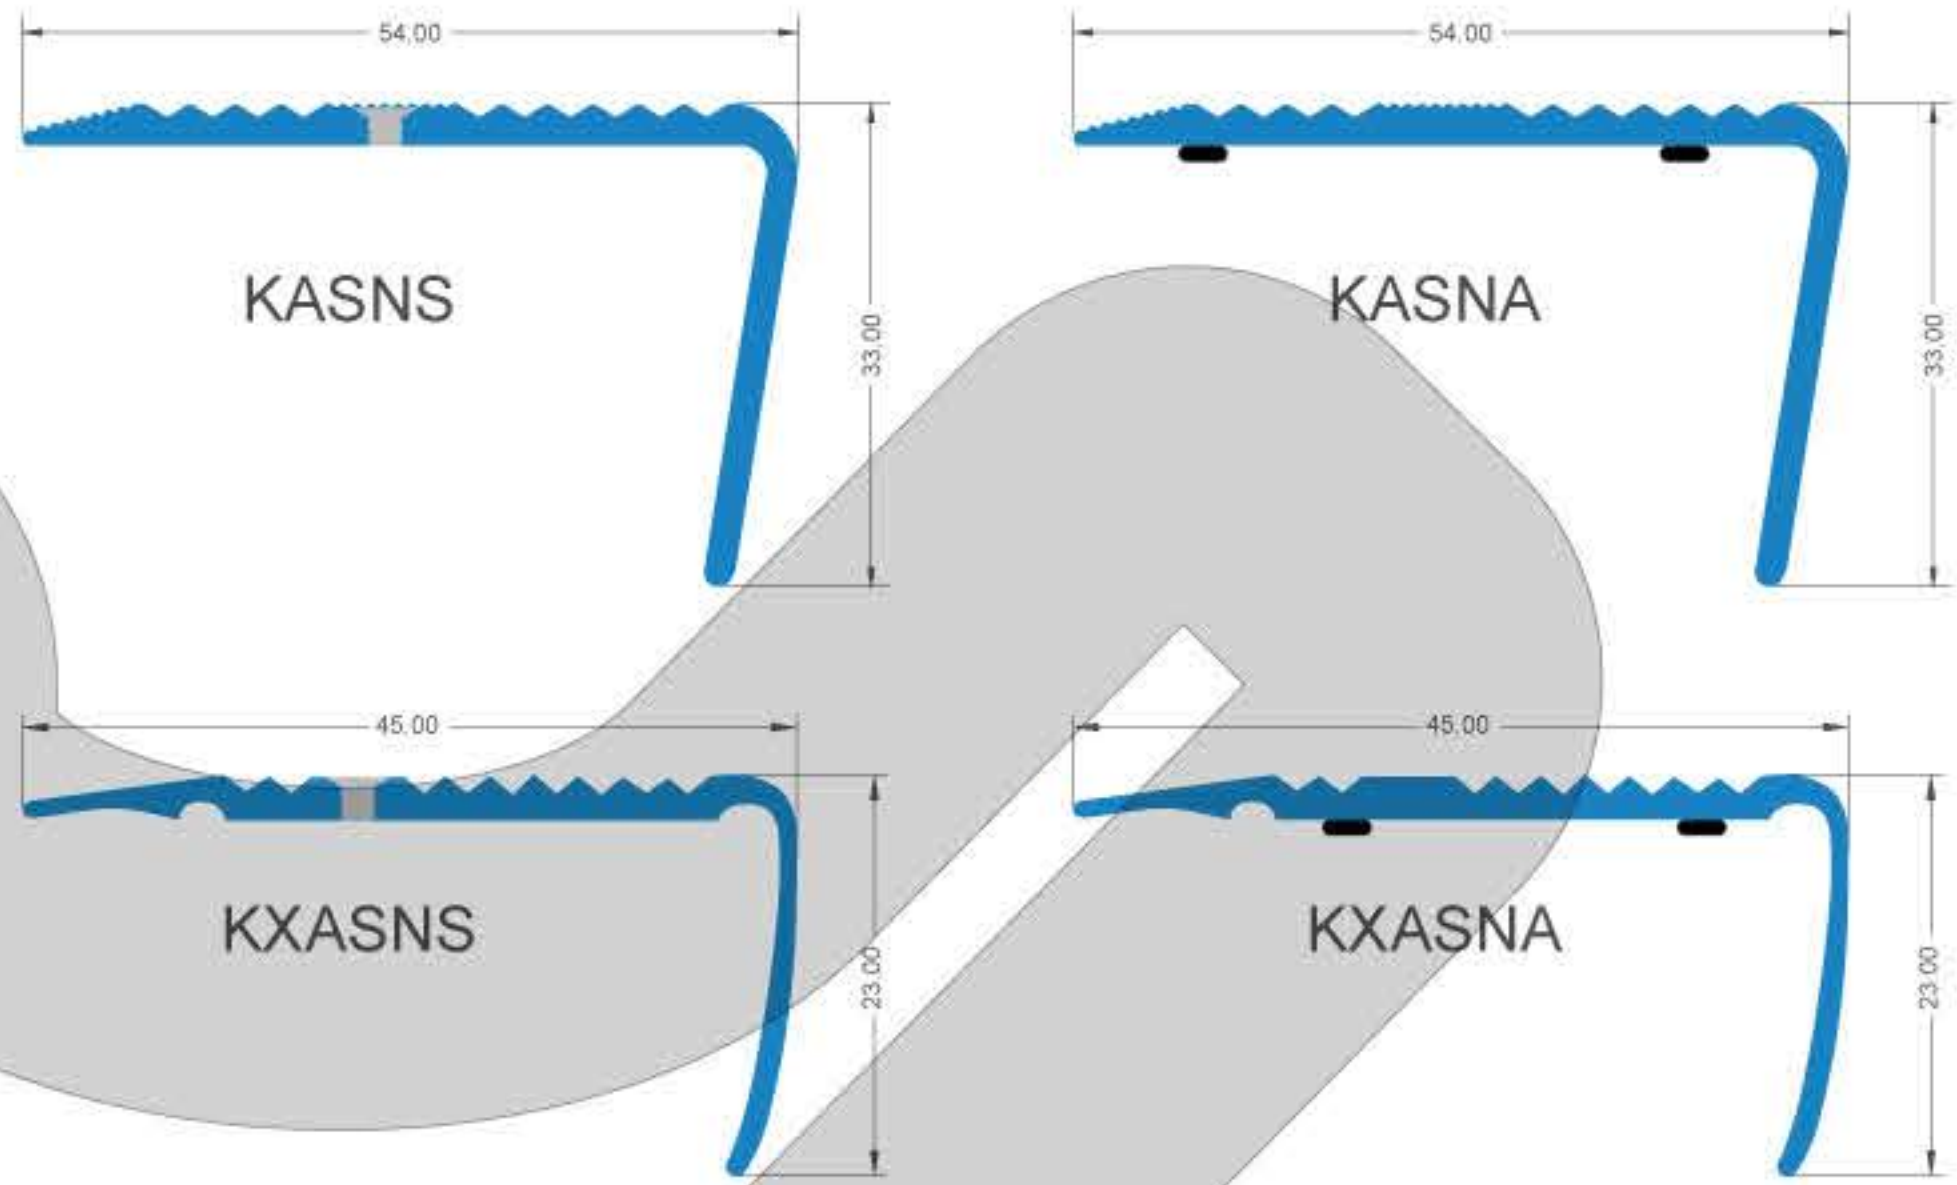


Profile Data

Chemical composition: In accordance with BS EN 573-3:2003 Aluminium and aluminium alloys. The trace elements of the composition which determine the alloy selected are 6063. **Thermal Treatment designations:** T6.

ARTICLE	W(mm)	H (mm)	L (mm)
KASNS-45-23-XX	54	33	3.30
KASNA-45-23-XX	54	33	3.30
KXASNS-45-23-XX	45	23	3.30
KXASNA-45-23-XX	45	23	3.30

» When ordering specify the color for example: KASNS-45-23-XX the XX stand as the profiles anodizing color.

Laying instructions

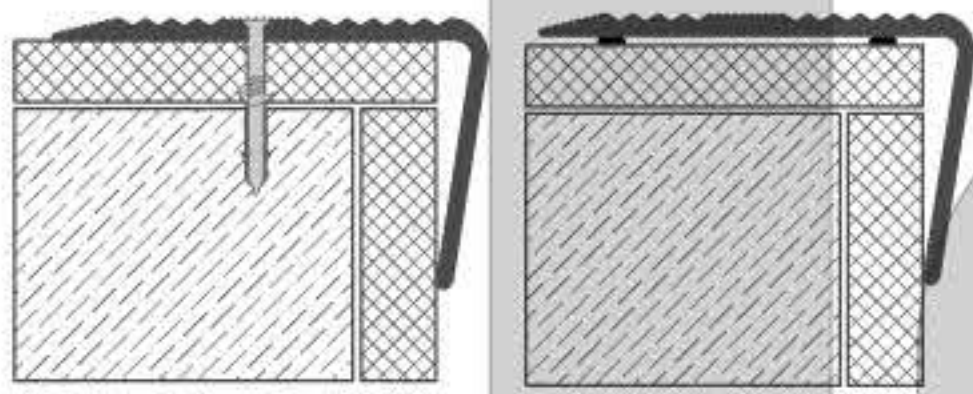

- 1 Ensure the steps are dry, clean, free of debris, level and even.
- 2 If Predrilled use the drill holes to mark steps for drilling location.
- 3 Drill and Plug the steps.
- 4 Apply suitable adhesive to the underside of the nosing and apply nosing to the step.
- 5 Screw down the step with the appropriate size screws.

Colors



MS Matt Silver



GT Matt Brown



MC Matt Black



MG-Matt Gold

Technical Data

Aluminium AA 6063T6 / UNS A96063
Anodished to DIN 17611

Si %	0.2 - 0.6
Fe %	0.35
Cu %	0.1
Mn %	0.1
Mg %	0.45 - 0.9
Zn %	0.1
Ti %	0.1
Cr %	0.1
Al	Balance

General Cleaning and Maintenance

» Aluminium Channel:
These can be polished using steel wool or cloth to maintain the appearance - under no circumstances should solvent cleaners be utilised in cleaning or maintaining Aluminium Products.

* Size can be customized, Production upon request, timing and price to be agreed.